


griptech

KOOI® REACHFORKS | with fork positioner FPN

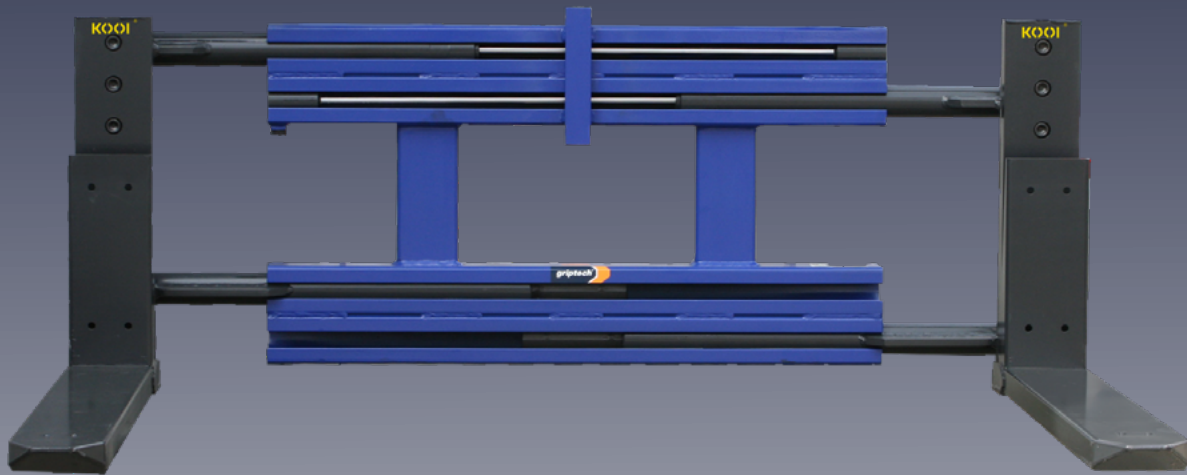

Attachments

Weighing systems

Camera systems

Features:

- ▶ Adjustment beyond the frame width
- ▶ Robust guide body with minimal possible lost load center
- ▶ Maximum visibility
- ▶ Piston rods protected within the guide profile
- ▶ 6 mm wear strip integrated into the outer fork



Adjustment beyond the frame width

The Griptech fork positioner FPN with an adjustment range up to beyond the frame width is particularly suitable for picking up long goods and wider pallets.


With the patented 'Integra' guide design, the adjustment cylinders are integrated into the guide body and also function as a sliding arm.

Features:

- Robust guide body with minimal lost load center
- Maximum visibility
- Piston rods protected within the guide profile
- KOOI® Reachforks bolted on
- 6 mm wear strip integrated into the outer fork

Design variants:

- As an attachment without sideshift
- As an attachment with separate sideshift
- Version integrated in the mast on request

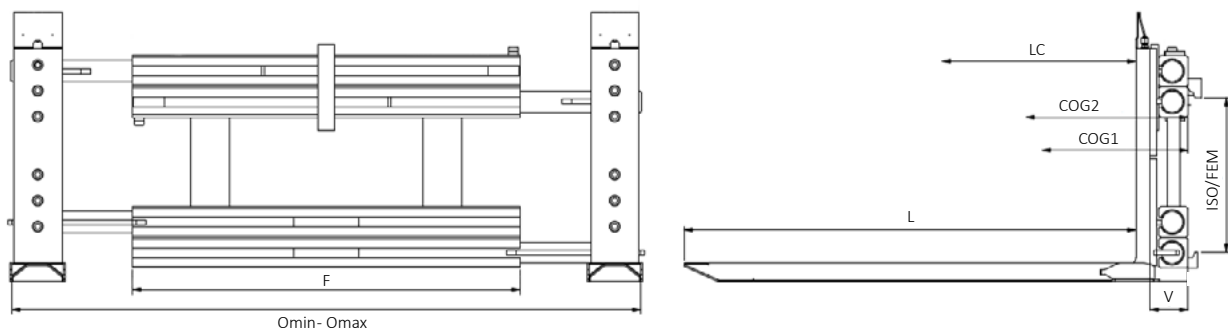

Adjustment up to beyond the frame width (2 functions, 3 functions if with sideshift)													
Series	Length L/K mm	Capacity in kg at LC mm	ISO/ FEM	F mm	Omin-Omax mm	Cross section D1/D2xS mm	V mm	without sideshift			Separate sideshift		
								COG1/2 mm	Wt. kg	V mm	COG1/2 mm	Wt. kg	
RG2 20/FPN 16	1200/850	1600/600	II	1050	570-1750	131/139x57	101	275/351	345	118	277/349	364	
RG2 20/FPN 16	1300/950*							300/386	365		307/391	374	
RG4 25/FPN 25	1200/850	2500/600	II	1150	570-1900	161/169x57	117	279/345	460	134	281/344	486	
RG4 25/FPN 25	1300/950*							308/386	475		309/384	499	
RG4 35/FPN 30	1200/850	3000/600	III	1200	570-1950	161/169x57	117	298/335	520	142	250/304	552	
RG4 35/FPN 30	1300/950*							267/336	533		274/338	570	
RG4 45/FPN 35	1200/850	3500/600	III	1250	570-1900	161/169x57	117	236/292	535	142	245/298	570	
RG4 45/FPN 35	1300/950*							261/328	548		269/333	582	
RG4 58/FPN 45	1200/850	4500/600	III	1300	570-1850	161/169x62	149	232/280	645	179	244/290	691	
RG4 58/FPN 45	1300/950*							248/305	692		268/323	708	
RG4 58/FPN 50	1200/850	5000/600	III	1350	570-1950	161/169x62	149	231/280	648	179	243/288	699	
RG4 58/FPN 50	1300/950*							257/315	665		266/320	716	
RG4 58/FPN 50	1200/850	5000/600	IV	1400	570-2000	161/169x62	154	207/247	790	194	227/264	858	
RG4 58/FPN 50	1300/950*							227/274	804		245/289	871	
RG4 77/FPN 60	1200/850	6000/600	IV	1500	570-2050	161/169x68	154	242/299	860	194	216/268	945	
RG4 77/FPN 60	1300/950*							265/331	878		239/299	965	