

# ***griptech***

## FORK POSITIONER | ZVC



Attachments

Weighing systems

Camera systems

### Features:



- ▶ Guide with robust omega profiles
- ▶ For attaching the original forks
- ▶ Optimale Sichtverhältnisse
- ▶ Optimum visibility
- ▶ Suitable for different fork widths

# FORK POSITIONER | ZVC

With adapter plates in Omega profiles

## Features:

- Guide with robust omega profiles
- For attaching the original forks
- Robust guidance of the adapter plate in omega profiles
- Optimum visibility
- With integrated or separate sideshift
- Suitable for different tine widths

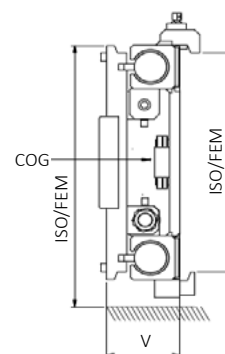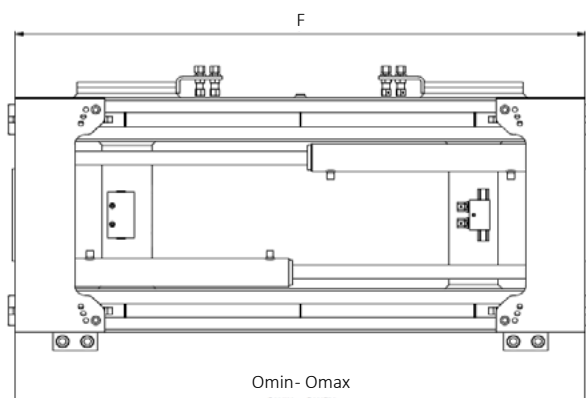

Fork positioner for standard ISO/FEM forks (1 function without, 2 functions if with sideshift)										
Series	Load capacity in kg at LC 600 mm	ISO/ FEM	F mm	Omin-Omax mm	Sideshift integrated / without			with separate sideshift*		
					V mm	COG mm	Weight kg	V mm	COG mm	Weight kg
ZVC-20	2000	II	850	430-850		49	102			
ZVC-20			900	430-900	120	49	106	127	51	125
ZVC-20			950	430-950		49	110		51	127
ZVC-20			1000	430-1000		50	114		52	129
ZVC-25	2500	II	1000	430-1000		51	114		51	130
ZVC-25			1050	430-1050		51	118		51	132
ZVC-25			1100	430-1100	120	51	122	127	51	134
ZVC-25			1150	430-1150		51	125		51	136
ZVC-25			1200	430-1200		51	129		51	138
ZVC-25			1250	430-1250		51	135		51	140
ZVC-32	3200	III	1150	450-1150		60	202		64	230
ZVC-32			1200	450-1200		60	205		64	232
ZVC-32			1250	450-1250	147	60	208	158	64	235
ZVC-32			1300	450-1300		60	211		64	238
ZVC-32			1350	450-1350		60	214		64	241
ZVC-40	4000	III	1200	450-1200		62	225		63	243
ZVC-40			1250	450-1250		62	228		63	246
ZVC-40			1300	450-1300	157	62	231	164	63	249
ZVC-40			1350	450-1350		62	234		63	252
ZVC-40			1400	450-1400		62	237		63	255