


# ***griptech***

## MANUAL KOOI® REACHFORKS | Grip&Reach

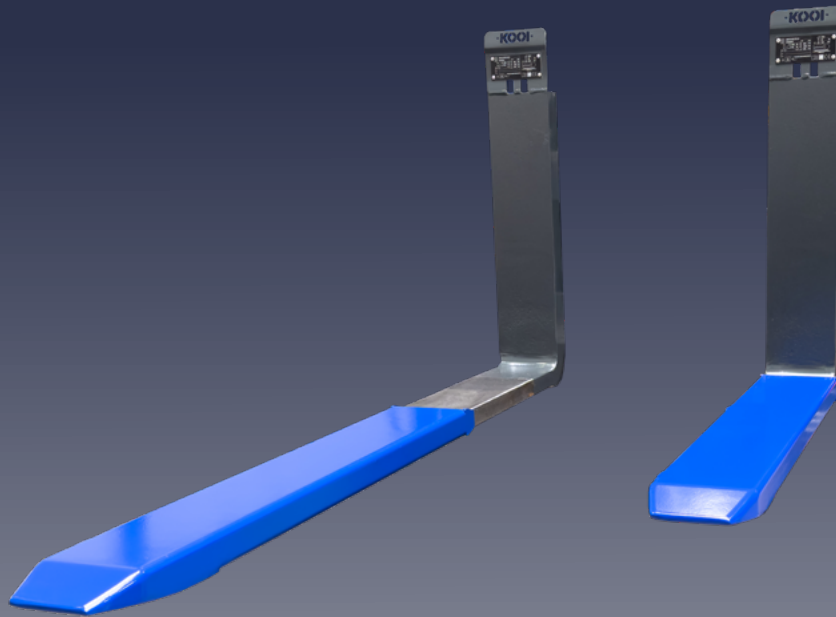

### Features:

- ▶ Lightweight yet robust construction
- ▶ Innovative outer forks that do not get caught on tension belts
- ▶ Can remain mounted on the forklift, and are therefore always available
- ▶ Easy and time-saving fork extension
- ▶ No hydraulic components



Attachments

Weighing systems


Camera systems

# MANUAL KOOI® REACHFORKS | Grip&Reach

The manual KOOI® Reachforks can be used to transport loads of different depths. This manual fork extension is a good and cheaper alternative to the clip-on fork extensions. The patented Grip&Reach KOOI® Reachforks are extended manually. The mechanically movable outer shoes are attached to the base fork and remain mounted on the forklift truck. The method of adjusting the outer shoes is highly innovative. To change the fork length, the pin in the tip of the fork, which also serves as a grease nipple, is moved sideways, which unlocks the lock. The outer shoes can now be pushed in or pulled out to the desired length with the other hand. The lock engages again automatically.

## Comparison with clip-on extension forks:

- You always have the extension with you and it is always ready for use
- Less physical strain
- Several lengths can be set via intermediate locks
- Including basic fork, making it an inexpensive alternative

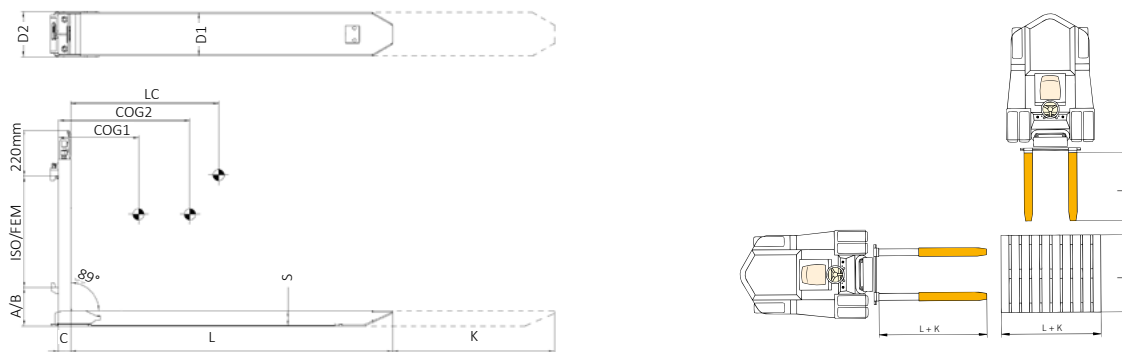

Manual KOOI® Reachforks one locking point retracted and one extended								
Series	Length L/K mm	Capacity in kg at 600 mm LC	ISO/FEM	For forklifts load cap. of up to	Cross section D1/ D2xS mm	C mm	COG1/COG2 mm	Weight/pair kg
<b>"Slim line"</b>								
G&R 17	800/200						230/260	100
G&R 17	800/400	1700	2A	1,6 t	132x41	40	230/289	100
G&R 17	1000/600						314/412	116
G&R 17	1200/800						406/536	136
G&R 24	800/200						220/275	104
G&R 24	800/400	2400	2A	2,5 t	132x45	45	220/275	104
G&R 24	1000/600						318/405	128
G&R 24	1200/800						385/515	135
<b>"Standard line"</b>								
G&R 20	800/200						254/280	129
G&R 20	800/400	2000	2A	2,0 t	132x58	45	254/307	129
G&R 20	1000/600						343/427	152
G&R 20	1200/800						434/553	174
G&R 20	1400/1000						528/681	197
G&R 30	800/200						237/262	139
G&R 30	800/400	3000	3A	3,0 t	132x58	45	237/286	139
G&R 30	1000/600						323/403	161
G&R 30	1200/800						413/525	184
G&R 35	800/200						239/262	152
G&R 35	800/400	3500	3A	3,2 t	132x63	50	239/285	152
G&R 35	1000/600						324/398	178
G&R 35	1200/800						414/520	202
G&R 35	1400/1000						510/644	226
G&R 50	800/400						241/290	194
G&R 50	1000/600	5000	3A	4,5 t	165x64	50	328/406	226
G&R 50	1200/800						417/528	257
G&R 50	1400/1000						509/653	289