


griptech

CARTON CLAMP | GPK-E

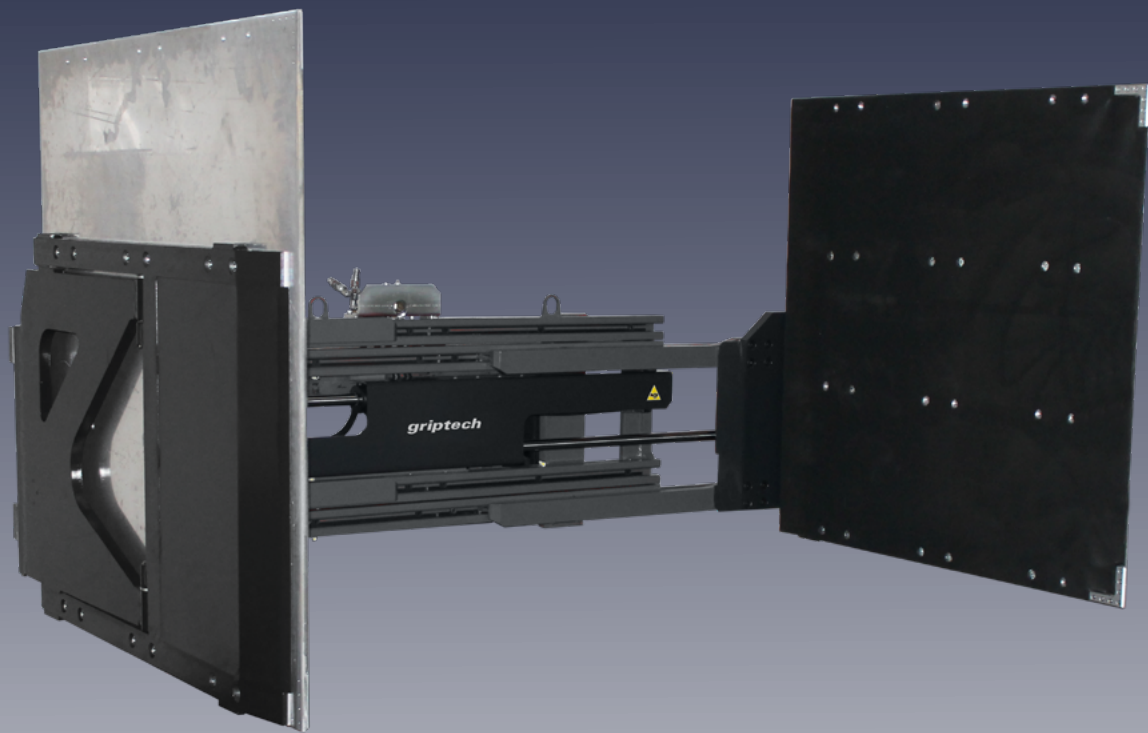

Attachments

Weighing systems

Camera systems

Features:

- ▶ Strong double T-profiles
- ▶ Aluminum contact plates with vulcanized rubber coating
- ▶ Contact plates rotatable in all 4 directions if needed
- ▶ Contact plates mounted with pendulum suspension
- ▶ Includes pressure regulation and return valve


CARTON CLAMP | GPK-E

Suitable for transporting “white goods” and handling large-volume cartons

Carton clamp with sideshift. Can be used in the transportation of „white goods“ and in large-volume carton handling. This GPK-E clamp type is characterized by the following features. Strong double T-profiles. Aluminium contact plates with vulcanized rubber coating (depending on variant). Both contact plates are mounted on oscillating bearings to ensure optimum load application. The contact plates can be rotated in all 4 directions if required. Arms in solid design to ensure even distribution of clamping force. Non-return and pressure-reducing valve with regeneration circuit.

Features:

- ▶ Strong double T-profiles
- ▶ Aluminum contact plates with vulcanized rubber coating
- ▶ Contact plates rotatable in all 4 directions if needed
- ▶ Contact plates mounted with pendulum suspension
- ▶ Includes pressure regulation and return valve
- ▶ Maximum operating pressure: 140 bar
- ▶ Replaceable contact plates
- ▶ Contact plates coated with non-slip rubber (equipment with the suffix “N”)

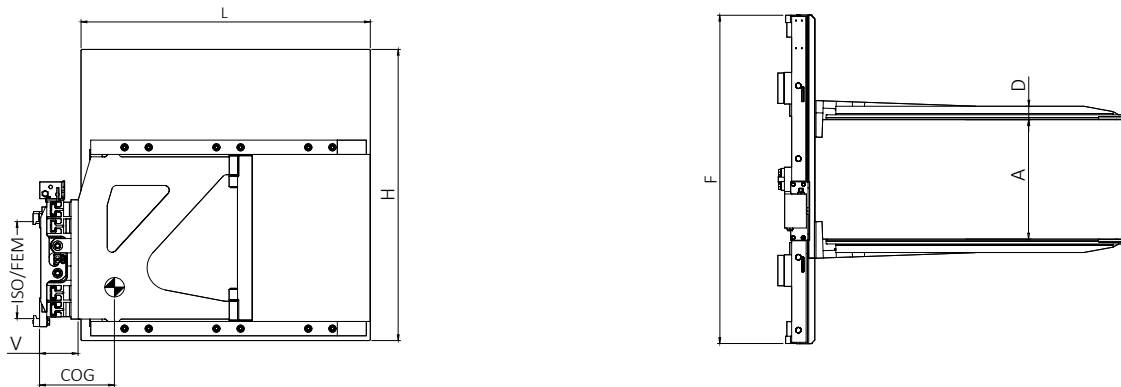

Carton clamp with swing arms (2 functions)

Series	Load capacity in kg at LC in mm	ISO/ FEM	Width F mm	Omin-Omax mm	L-H mm	D mm	COG mm	V mm	Weight kg
GPK15E065C.1212G	1600/500	II	960	450-1610	1220-1220	65	459	183	569
GPK15E065C.1012N				470-1630	1020-1220	55	375		523
GPK15E065C.1212N				470-1630	1220-1220	55	459		569
GPK15E065C.1013N				470-1630	1020-1370	55	462		533
GPK15E065C.1213N				470-1630	1220-1370	55	475		581
GPK15E175C.1012N	1600/500	II	1060	580-1940	1020-1220	55	381	183	540
GPK15E175C.1212N				580-1940	1220-1220	55	465		586
GPK15E175C.1013N				580-1940	1020-1370	55	468		550
GPK15E175C.1213N				580-1940	1220-1370	55	481		598