


griptech

FORK CLAMP | GPH-E

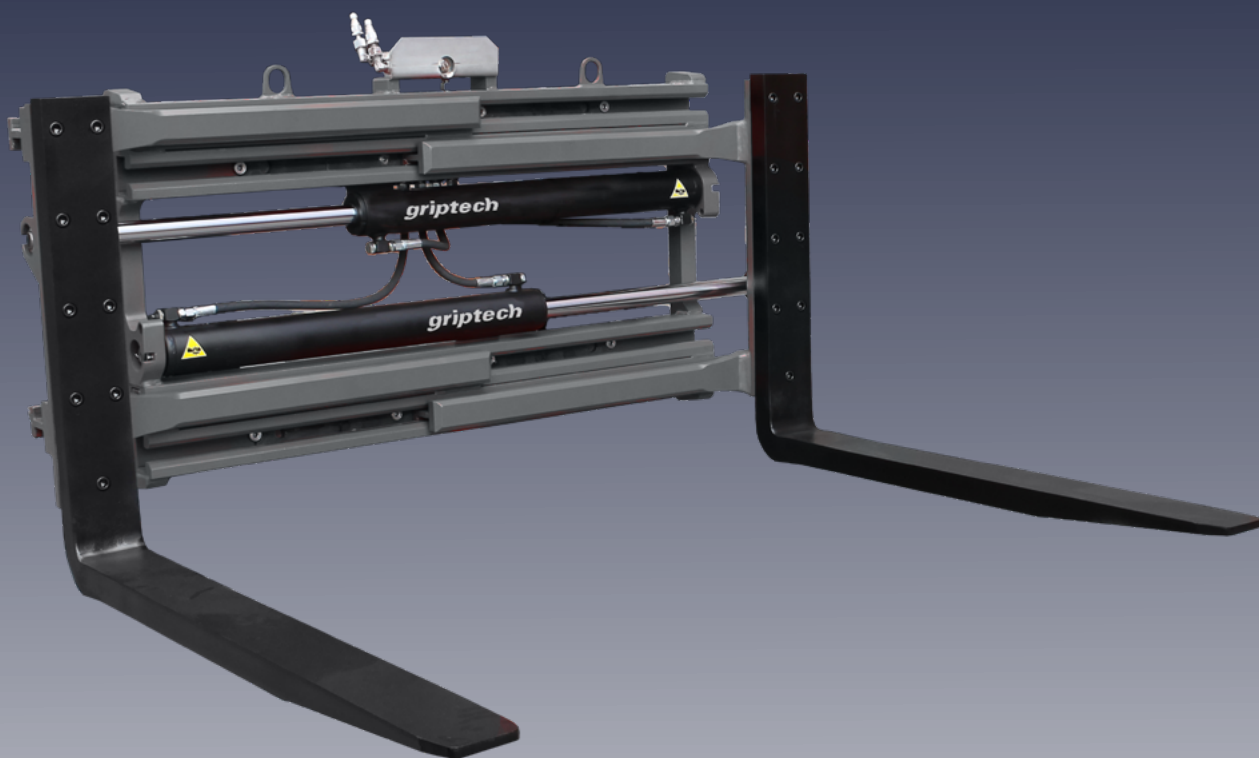

Attachments

Weighing systems

Camera systems


Features:

- ▶ Capable of hydraulic clamping and fork positioning
- ▶ Suitable for EPAL pallets
- ▶ 30 mm tip convergence at 1,000 mm fork length
- ▶ Clamping capacity up to 5,000 kg with a 600 mm load center
- ▶ Integrated sideshift and compact lost load center

FORK CLAMP | GPH-E

The GPH-E Fork Clamp – a true all-rounder

It combines safe pallet handling with hydraulic clamping of different loads and fork positioning. The use of optional slip-on arms further increases versatility and transport safety. The integrated sideshift ensures reliable lateral movement with a low lost load center, compensating for approach inaccuracies.

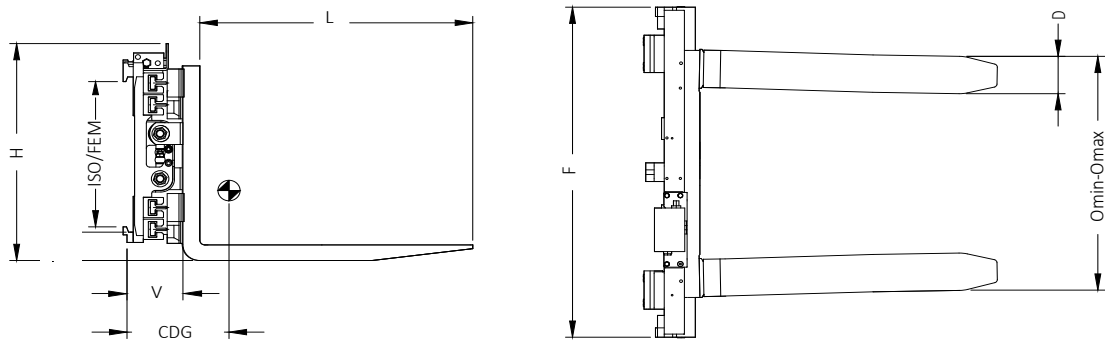

Fork clamp fork length L = 1200 mm (2 functions)

Series	Load capacity in kg on clamping / forks	LC mm	ISO/ FEM	Width F mm	Omin-Omax mm	Cross section DxS mm	V mm	COG mm	Weight kg
GPH15E065C.120	1200/1400	500	II	960	550-1710	120x35	142	230	315
GPH15E165C.120				1060	550-1810		142	224	328
GPH15E265C.120				1160	550-1910		142	220	335
GPH20E065C.120	1900/2200	500	II	960	565-1725	120x40	142	247	337
GPH20E155C.120				1060	465-1625		142	240	350
GPH30E065E.120	2200/2900	500	III	960	565-1725	120x50	142	274	370
GPH30E165E.120				1060	565-1825		142	265	383
GPH30E265E.120				1160	565-1925		142	260	390
GPH30E465E.120				1360	565-2125		142	253	405
GPH40E365E.120	3500/4200	600	III	1250	560-1960	150x50	173	232	639
GPH40E465E.120				1350	560-2060		173	231	651
GPH50E465G.120	4200/5000	600	IV	1350	560-2060	150x60	173	260	695
GPH50E665G.120				1550	560-2260		173	251	726
GPH60E665G.120	5000/6000	600	IV	1550	560-2260	150x70	165	269	733
GPH60E765G.120				1650	560-2360		165	266	745